


Wiring of the WWS with external alarm interface

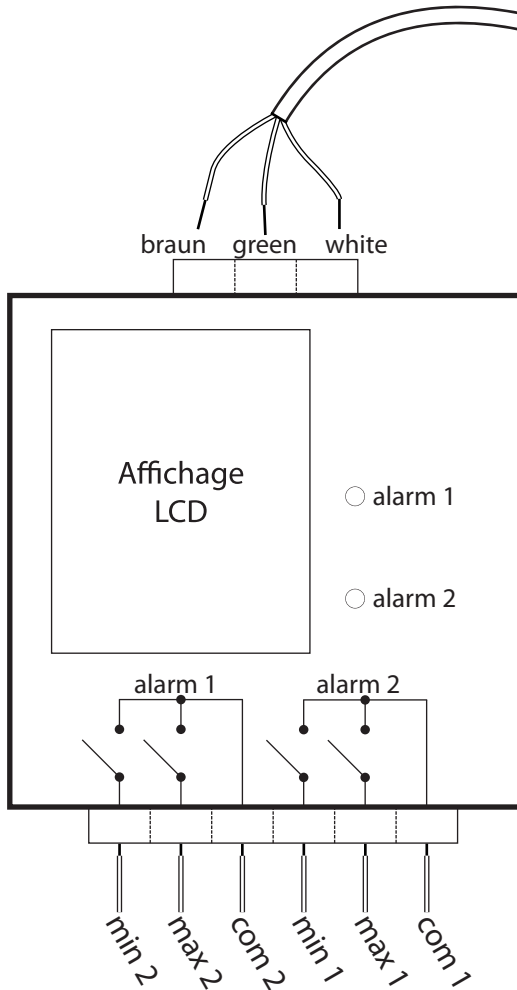

Internal relay specifications:

- Bistable (keep the current state even if the WWS is not powered)
- I max 1A / V max 48V (DC/AC)

Remarks:

The outputs can command high power relays or power systems.



JDC ELECTRONIC SA
Rue des Uttins 40
CH-1400 Yverdon
Switzerland

www.jdc.ch
info@jdc.ch
P: +41 24 445 21 21
F: +41 24 445 21 23